PUMP PART NUMBER: 99126

SPECIFICATIONS - B&G 90-6S

INLINE, PERMANENTLY LUBRICATED

FLANGE SIZE: 1-1/2"

PUMP BODY: CAST IRON

HORSEPOWER: 3/4

VOLTAGE: 115V/230V/1PH/60HZ FLA: 13.8A (115V) / 6.9A (230V)

MAX. OPERATING TEMPERATURE: 225°F

MAX. WORKING PRESSURE: 175 PSI OVERALL DIMENSION: 16"H X 7-7/8"D

FLANGE FACE-TO-FACE: 11-1/2"

CIRCUIT SETTER PART NUMBER: 92081-2.0

SPECIFICATIONS


CONNECTION SIZE: 2" NPT

BODY: BRASS

MAX OPERATING TEMP.: 250°F

MAX. WORKING PRESSURE: 300 PSI

OVERALL DIMENSION: 5.13"L X 4.44"H X 3.98"D

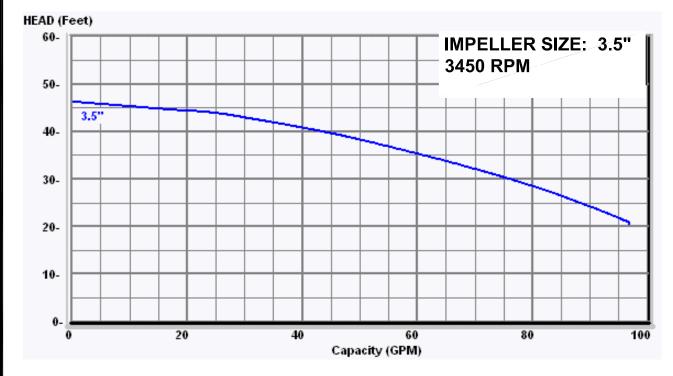

INSTALLATION OPERATING CONDITIONS BOILER MODEL BOILER LOOP FLOW BOILER LOOP AT (°F) BOILER LOOP PRESSURE DROP (FT. HD.)

NOTE:

AERCO PRIMARY LOOP DESIGN GUIDELINES (C400.3 - AM SERIES)

MUST BE CONSULTED TO DETERMINE THE APPLICATION FOR THIS PUMP/CIRCUIT SETTER KIT.



DWN.BY_CZ_ D	ATE 071515	
SCALES	IZE	AP-A-1020
CHKDA	PPD	/11 /1 1020
REV. DATE		

В