PUMP PART NUMBER: 99124

SPECIFICATIONS - B&G PL-36

INLINE, PERMANENTLY LUBRICATED

FLANGE SIZE: 1-1/2"

PUMP BODY: CAST IRON

HORSEPOWER: 1/6

VOLTAGE: 115V/1PH/60HZ

FLA: 2.1 A

MAX. OPERATING TEMPERATURE: 225°F MAX. WORKING PRESSURE: 150 PSI OVERALL DIMENSION: 8-5/8"H X 4-3/8"D

FLANGE FACE-TO-FACE: 6-3/8"

CIRCUIT SETTER PART NUMBER: 92081-2.0

**SPECIFICATIONS** 


**CONNECTION SIZE: 2" NPT** 

**BODY: BRASS** 

MAX OPERATING TEMP.: 250°F

MAX. WORKING PRESSURE: 300 PSI

OVERALL DIMENSION: 5.13"L X 4.44"H X 3.98"D

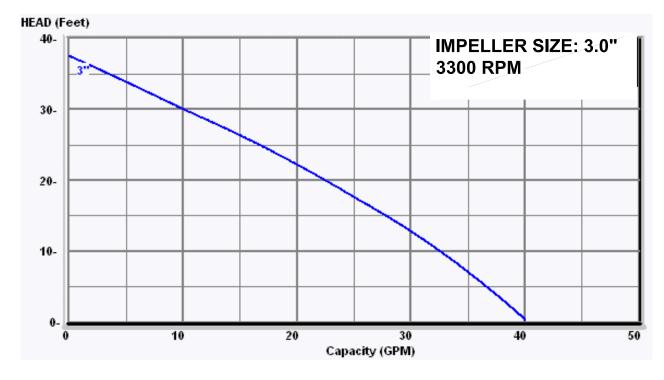

## PRESSURE DROP (FT. HD.)

**INSTALLATION OPERATING** 

CONDITIONS

**BOILER MODEL** 

BOILER LOOP FLOW BOILER LOOP ΔT

(°F) BOILER LOOP

## NOTE:

AERCO MODULEX PRIMARY LOOP DESIGN GUIDELINES (DOCUMENT C400.2) MUST BE CONSULTED TO DETERMINE THE APPLICATION FOR THIS PUMP/CIRCUIT SETTER KIT.

## AERCO INTERNATIONAL, INC. NORTHVALE, NJ 07647

PUMP / CIRCUIT SETTER KIT 99127-2

DWN.BY_CZ_	_DATE_070810
	_SIZE
CHKD	_APPD
REV. DATE .	

AP-A-866

