PUMP PART NUMBER: 99125

<u>SPECIFICATIONS</u> - B&G PL-130/2" INLINE, PERMANENTLY LUBRICATED

FLANGE SIZE: 2"

PUMP BODY: CAST IRON

HORSEPOWER: 2/5

VOLTAGE: 115V/1PH/60HZ

FLA: 4.8 A

MAX. OPERATING TEMPERATURE: 225°F MAX. WORKING PRESSURE: 150 PSI OVERALL DIMENSION: 10-3/4"H X 5-1/8"D

FLANGE FACE-TO-FACE: 8-1/2"

CIRCUIT SETTER PART NUMBER: 92081-2.0

SPECIFICATIONS


CONNECTION SIZE: 2" NPT

BODY: BRASS

MAX OPERATING TEMP.: 250°F

MAX. WORKING PRESSURE: 300 PSI

OVERALL DIMENSION: 5.13"L X 4.44"H X 3.98"D

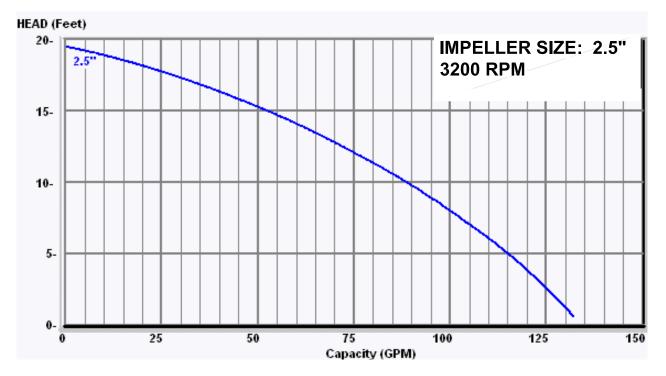

INSTALLATION OPERATING CONDITIONS BOILER MODEL BOILER LOOP FLOW BOILER LOOP AT (°F) BOILER LOOP PRESSURE DROP (FT. HD.)

NOTE:

AERCO PRIMARY LOOP DESIGN GUIDELINES (C400.2 - MODULEX; C400.3 - AM SERIES) <u>MUST</u> BE CONSULTED TO DETERMINE THE APPLICATION FOR THIS PUMP/CIRCUIT SETTER KIT.



PUMP / CIRCUIT SETTER KIT 99127-3

DWN.BY_CZ	_DATE_070810
SCALE	
CHKD	_APPD
REV. DATE .	

AP-A-867

