

PUMP PART NUMBER: 69228

CIRCUIT SETTER PART NUMBER: 92081-2.5

SPECIFICATIONS - B&G PL-75

INLINE, PERMANENTLY LUBRICATED

FLANGE SIZE: 2"

PUMP BODY: CAST IRON

IMPELLER DIAM: 2.0"

HORSEPOWER: 1/6

VOLTAGE: 115V/1PH/60HZ

FLA: 2.1 A

MAX. OPERATING TEMPERATURE: 225°F

MAX. WORKING PRESSURE: 150 PSI

OVERALL DIMENSION: 9-15/16"H X 4-5/8"D

FLANGE FACE-TO-FACE: 8-1/2"

SPECIFICATIONS

CONNECTION SIZE: 2-1/2" NPT

BODY: BRASS


MAX OPERATING TEMP.: 250°F

MAX. WORKING PRESSURE: 300 PSI

OVERALL DIMENSION:

6.00"L X 4.83"H X 4.51"D

HEAD (Feet)

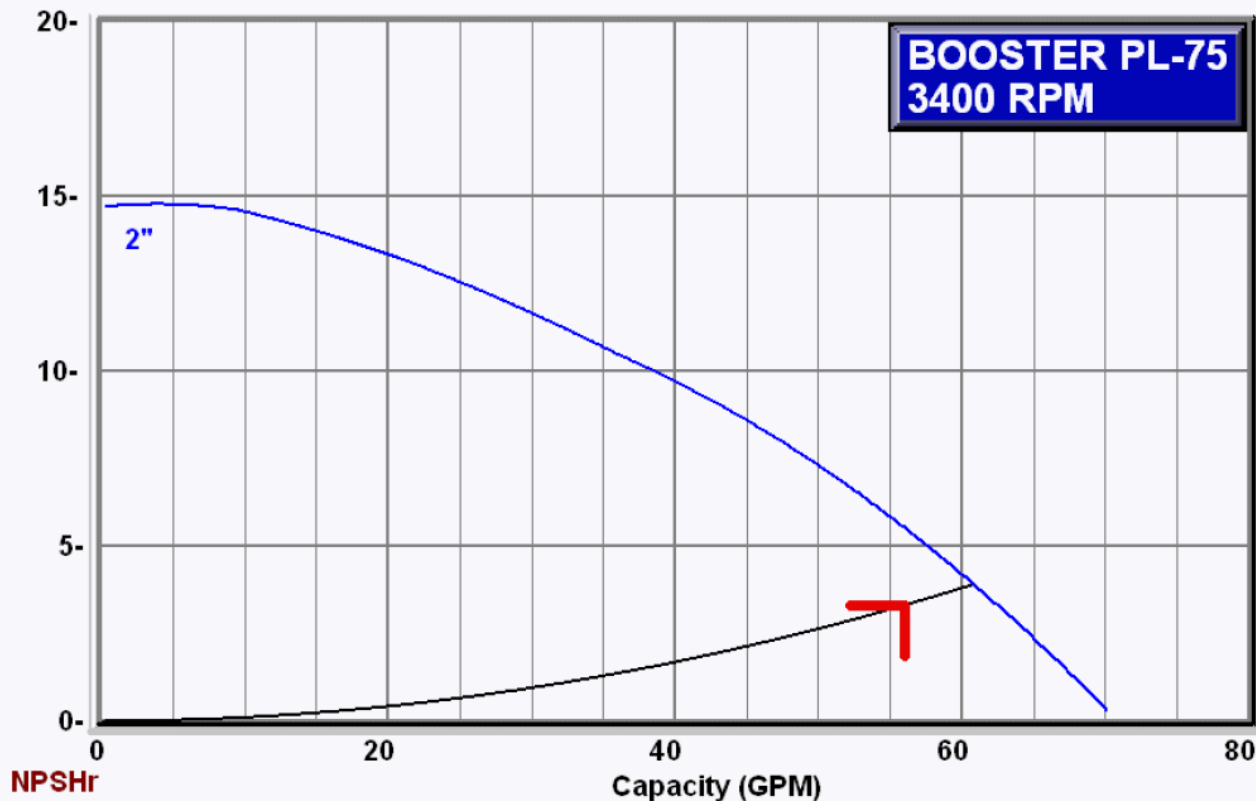

INSTALLATION OPERATING CONDITIONS

BOILER MODEL	
BOILER LOOP FLOW	
BOILER LOOP ΔT (°F)	
BOILER LOOP PRESSURE DROP (FT. HD.)	

NPSHr(ft)

0

0

AERCO INTERNATIONAL, INC.
NORTHVALE, NJ 07647

PUMP / CIRCUIT SETTER KIT
99127-6

NOTE: AERCO MODULEX PRIMARY LOOP DESIGN GUIDELINES (DOCUMENT C400.2) **MUST** BE CONSULTED TO DETERMINE THE APPLICATION FOR THIS PUMP/CIRCUIT SETTER KIT.

DWN. BY	CZ	DATE	060314
SCALE		SIZE	
CHKD.		APPD.	
REV.		DATE	

AP-A-962

REV. B