



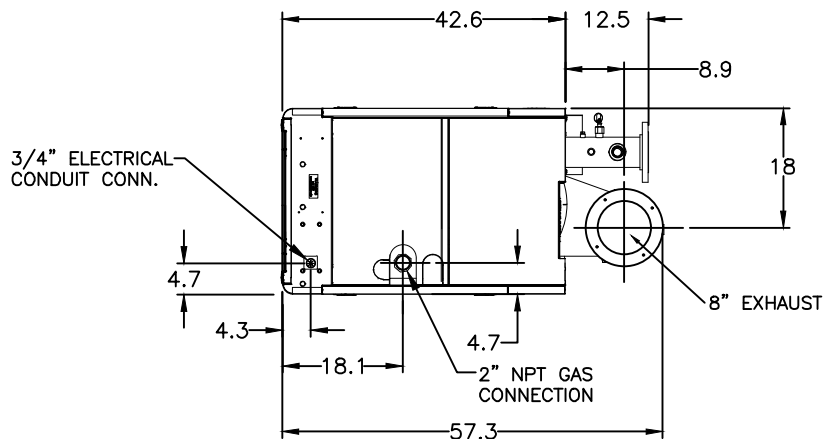

MATERIALS OF CONSTRUCTION				
COMBUSTION CHAMBER	SHELL OUTER-1/4" CARBON STEEL,SA-53 GR.B			
	SHELL INNER-1/4"STAINLESS STEEL,SA-240, 439SS			
	HEAD-1/2" CARBON STEEL,SA-516 GR.70			
	EXPANSION JOINT-1/4" STAINLESS STEEL,SA-240,439SS			
HEAT EXCHANGER	UPPER TUBESHEET- 1/4" STAINLESS STEEL,SA-240,439SS			
	LOWER TUBESHEET- 1/4" STAINLESS STEEL,SA-240,439SS			
	TUBES-STAINLESS STEEL,SA-249,439SS			
	SHELL-1/4" CARBON STEEL,SA-53,GR.A OR B			
HEAT EXCHANGERS & COMBUSTION CHAMBER DESIGN STANDARDS				
MAX. WORKING PRESS. (PSIG)	MAXIMUM TEMP. (°F)	TEST PRESS. (PSIG)	HT'G SURFACE SQ.FT.	MIN. RELIEF VA. CAPACITY MBH
160	210	240	90	1500
160	210	240	116	2000
ASME B & PV CODE: SECTION IV STAMP H				

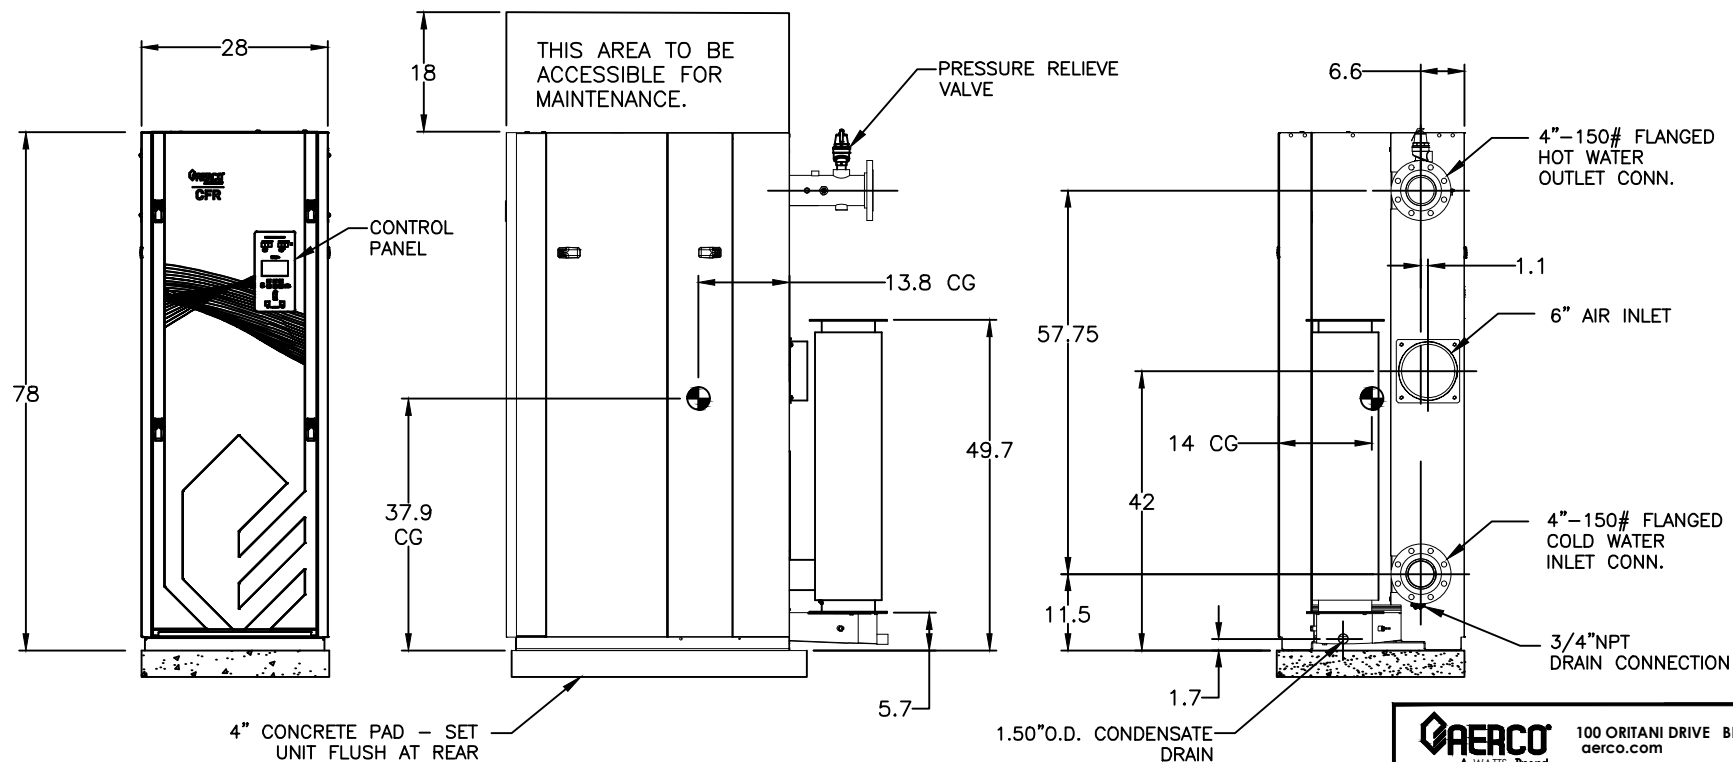

NOTES:

- 1) RELIEF VALVE, TRIDICATOR & CONDENSATE TRAP ARE INCLUDED SEPARATELY IN SHIPMENT.
- 2) AERCO RESERVES THE RIGHT TO MODIFY BOILER DIMENSIONS WITHOUT PRIOR NOTICE.



100 ORITANI DRIVE BLAUVELT, NY 10913
aerco.com

CFR 1500/2000 MBH BOILER
DIMENSIONAL DRAWINGS

DWN.BY_K.S. DATE 052223
SCALE_NTS_SIZE_A
CHKD._APPD._
REV.BY_K.S. DATE 051225

AP-A-1092

REV.
D