
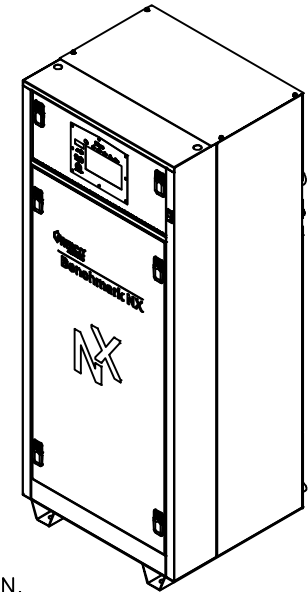


HEAT EXCHANGER DESIGN STANDARDS			
	MAX. WORKING PRESS. (PSIG)	MAXIMUM TEMP. (°F)	TEST PRESS. (PSIG)
SHELL SIDE	160	210	240
ASME B & PV CODE: SECTION IV STAMP H			

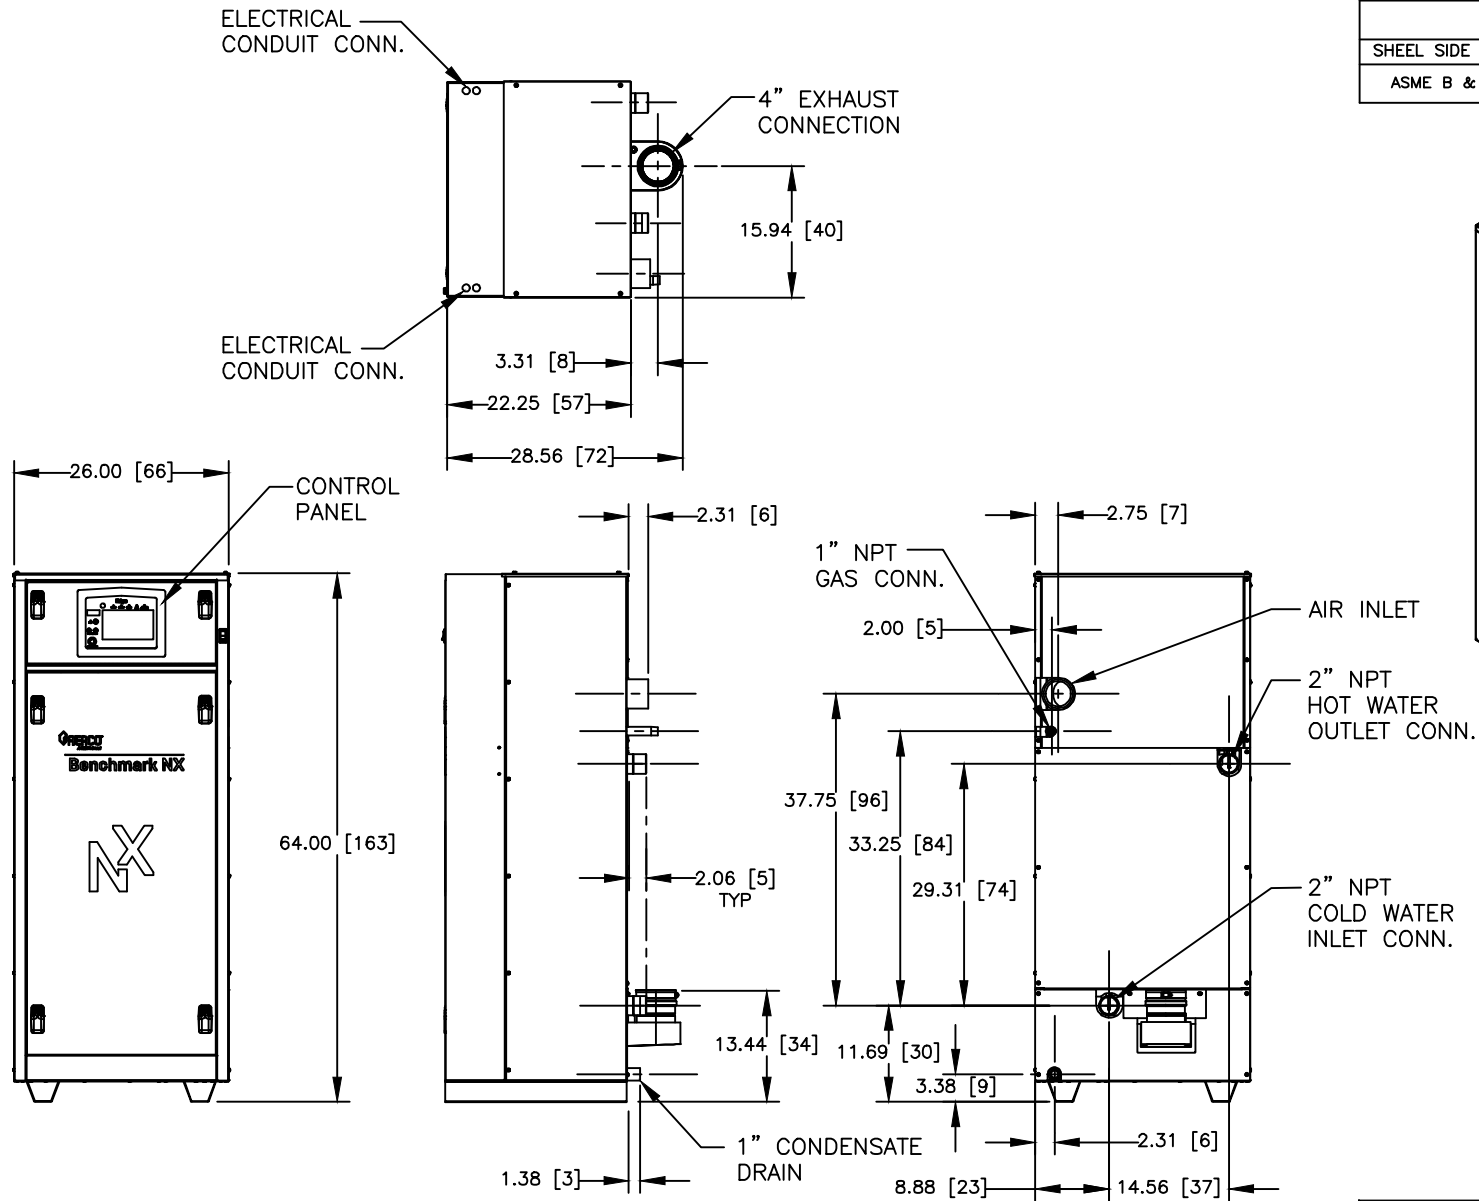

- NOTES:
- 1) ALL DIMENSIONS SHOWN ARE IN INCHES (CENTIMETERS).
 - 2) AERCO RESERVES THE RIGHT TO MODIFY BOILER DIMENSIONS WITHOUT PRIOR NOTICE.

 AERCO <i>A WATTS Brand</i>		100 ORITANI DRIVE BLAUVELT, NY 10913 aerco.com	
BENCHMARK NX 399-500 MBH HIGH EFFICIENCY BOILER DIMENSIONAL DRAWING			
DWN.BY <u>K.S.</u> DATE <u>011226</u> SCALE <u>NTS</u> REV.BY <u>K.S.</u> DATE <u>050626</u>		AP-A-1106	REV. B